



INTEGRATED
OFFICE PARTITION WALL
SYSTEM

COMPANY OVERVIEW

Since its establishment, Egood has been to research and development of new partition wall and improved construction and processing technology as the development focus, the company has nearly 30 patent certificates, and its products are the industry leader in R&D technology.

CERTIFICATIONS

Passed national fire detection for 120 minutes
Passed ISO9001 system certification
Passed Guangdong 43dB sound insulation test
Passed Guangdong Intensity Impact Certification

PRODUCTION NETWORK

Suzhou, Jiangsu Foshan, Guangdong Capital Beijing

AN OFFICE ENVIRONMENT THAT MAKES YOU FEEL COMFORTABLE

Simple design creates a bright, spacious and attractive office environment

Humanized design
Scientific and environmental protection
Popular love
Update fast

EASY TO ENJOY AND HAVE MORE

Bright space, open view, creating a pleasant working environment
Unleash passion and inspire unlimited creativity and innovative thinking

Find the rhythm of inspiration in the space, not drifting, relaxing, doing things simple






Promote changes in the era of prefabricated finished walls

| Provide human beings with an environmentally friendly, comfortable and energy-saving living environment

Excellent Technical Team

Guangdong Egood Partition Products Co., Ltd established in 1998, located in Foshan China, is a professional manufacturer engaged in research& development, production, sales and after-sales service of manual and motorized movable partition wall system and office glass partition system.




Advanced Production equipment




We have leading production equipment, customized one-time roll forming equipment for steel keels and steel plates, and domestic advanced automated laser processing equipment. It ensures the accuracy and stability of the product, and also greatly improves production efficiency.

Brand new wall solution

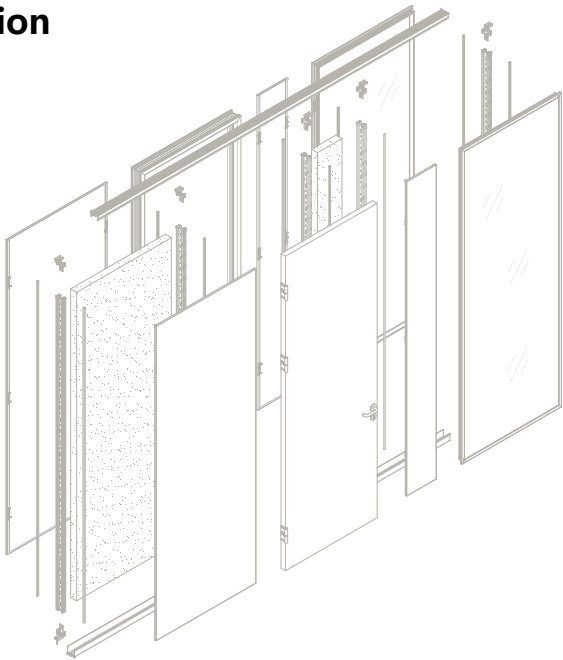

We create
for you

We are committed to developing technologies for the future that meet the highest standards in design, environmental protection, comfort and energy saving, by tirelessly seeking new solutions. We offer design assurance for new builds and renovations, giving you the best quality and widest choice of options



AE Prefabricated finished walls provided:

Vision:


Prefabricated finished wall solutions can meet your individual needs for each project.

Product:

It has high-quality products and unique and diverse product structure systems.

service:

Provide customized solutions and a complete project construction management system.

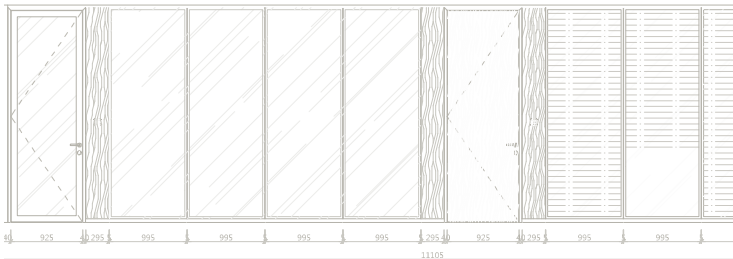

Future Installation method

Structural

Diversification

Prefabricated What does it mean that decoration technology replaces traditional decoration mode? The significance of its existence is not just to consume shorter installation time and less labor, but to surpass manual work in terms of accuracy and quality, resulting in less waste and higher sustainability. For customers, this decoration method has faster returns, lower time and holding costs, and lower risks.



We provide highly targeted designs and functions for your special requirements.

Every project has functional and aesthetic requirements. Therefore, we will tailor solutions for you according to the special needs of the project.

Flexible performance


Easy to maintain



The vertical keel can not only install panels and frames, but also add hanging brackets, hooks, and hanging cabinet functions to the panel wall. These features can be quickly installed without tools, allowing the walls to be designed according to different needs, making your office space more flexible.


Frame and panels can be easily removed

During the maintenance process, the buckle-type outer frame and panel can be easily removed to repair strong and weak current lines. And it was carried out without forcibly demolishing the wall and generating dust and noise.

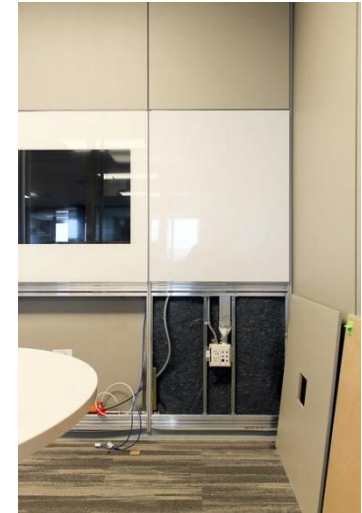

Prefabricated

Advantages of finished walls

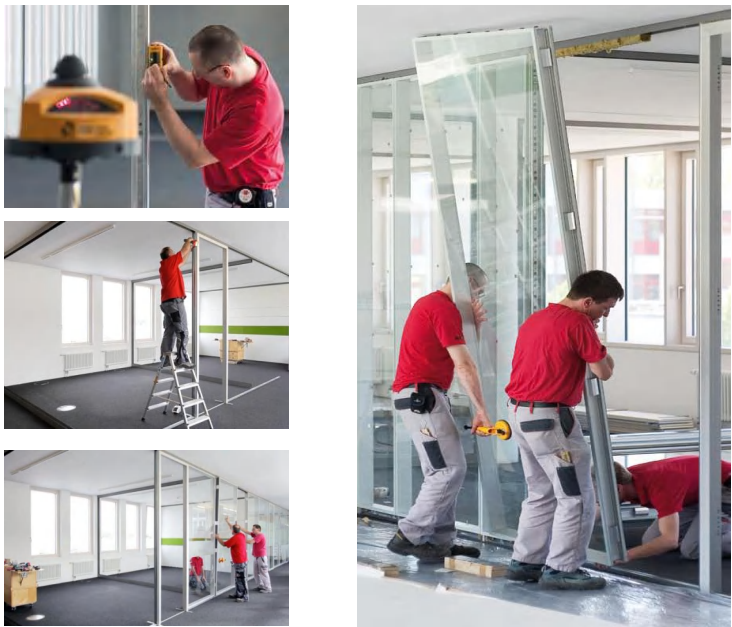

The prefabricated structure can continuously complete multiple or all processes of the project in sequence, thereby reducing the type and quantity of construction machinery entering the site, eliminating idle time in process connection, realizing three-dimensional crossover operations, and reducing construction personnel, thereby improving work efficiency and reducing costs.

Traditional construction methods



Complicated and time-consuming




Generate more construction waste



Dust pollution



Noise pollution



Fire hazards



Construction waste

Finished wall installation

Process



Modular interior decoration system installation process

▶ Steel frame



▶ In-wall wiring



▶ Sound insulation





▶ Decorative surface



Office, Corridor



Meeting Room, exhibition hall, multi-purpose hall

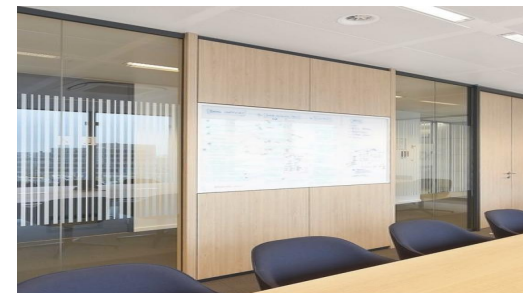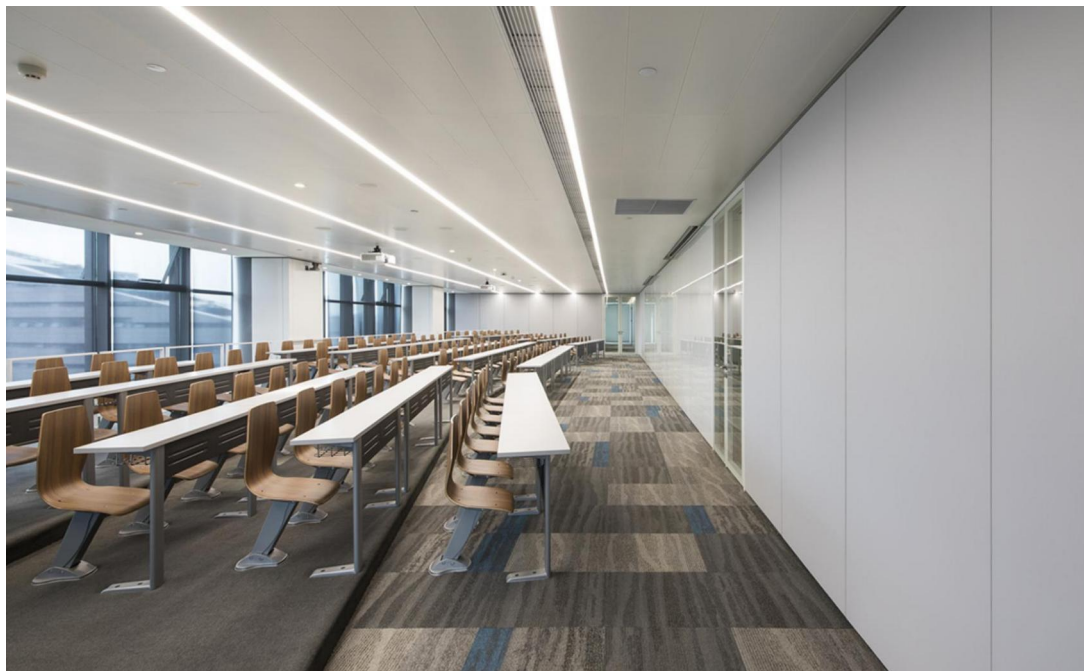

Reception area




Medical laboratory system




Conference hall, cinema






Prefabricated Introduction to finished walls

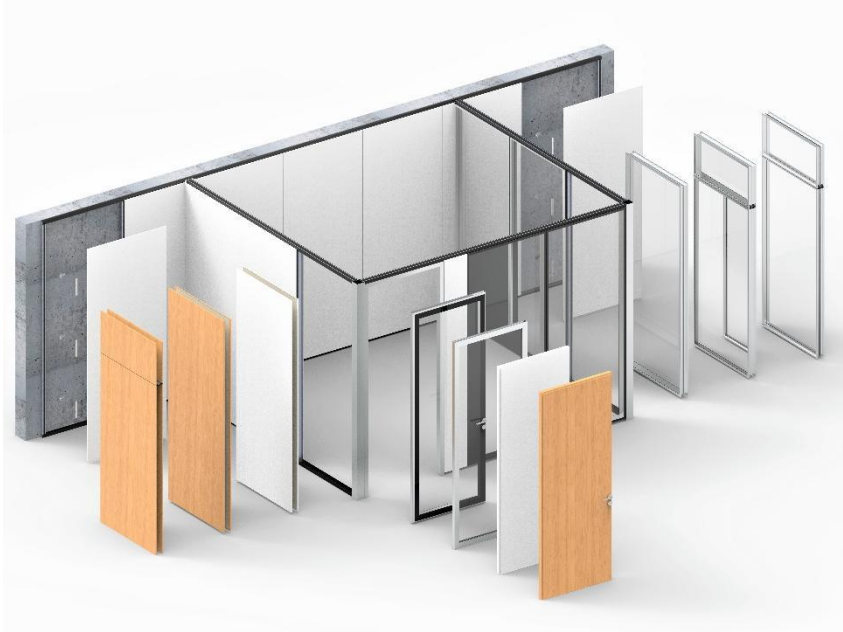

Wall assembly drawing

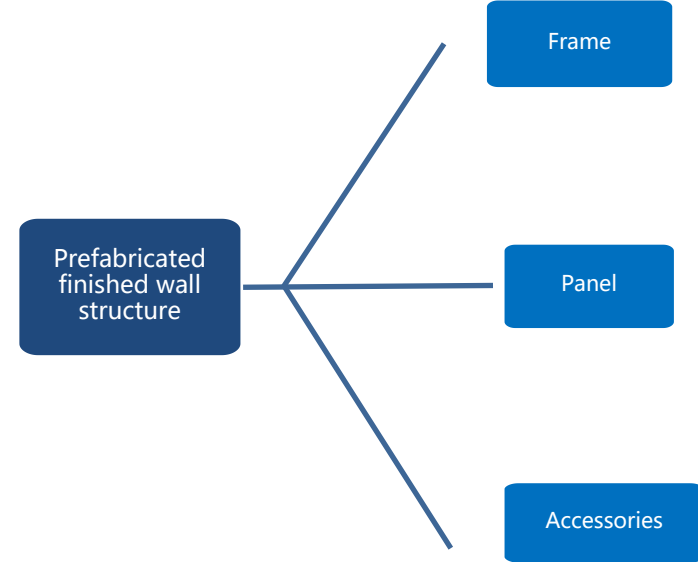

30 style -Simple system EGG-30H Panoramic single middle glass

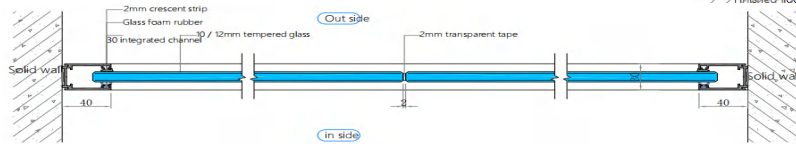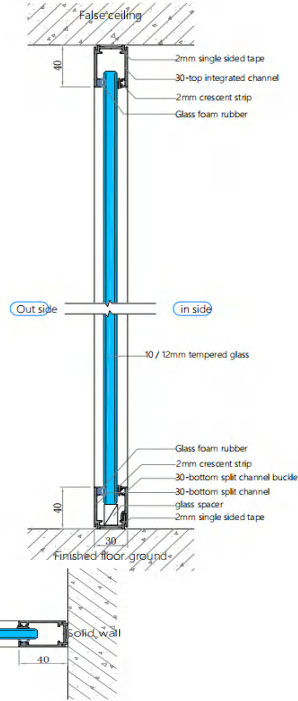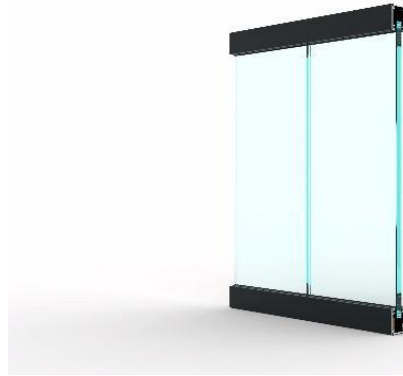

Frame: 6061-T6 Aluminum , Webster hardness 14hw, powder coating film thickness 80μm

Material thickness: 2.0~3.8mm

Panel: 12mm / 10mm tempered glass, 5+5, 6+6 laminated glass

Changhong glass 12mm/10mm/5+5mm, 6+6mm laminated glass

Wall thickness: 30mm



Sound Insulation: 32~35dB

Adjustment height: 20mm

30 style -Simple system
EGG-30H Panoramic single middle glass



90 Style-Module system EGG-90A-Exposed Frame double glass wall

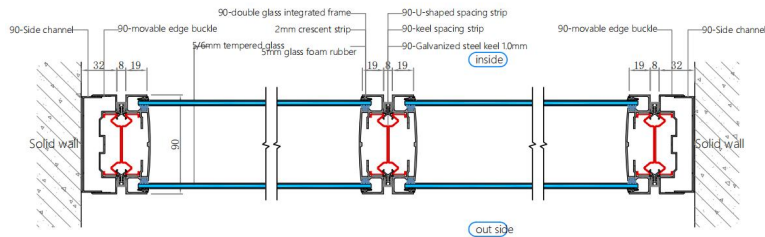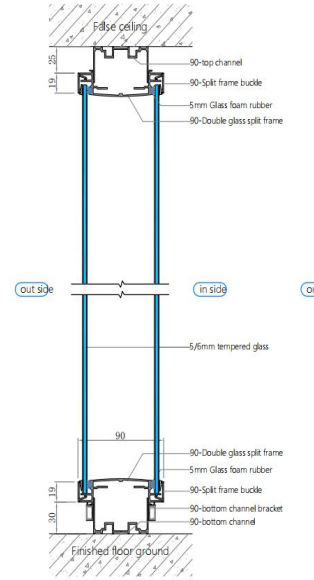

Frame: 6061-T6 Aluminum, Webster hardness 14hw, powder coating film thickness 80μm

Material thickness: 1.5 - 3.8mm

Keel: 1.0mm galvanized steel plate



Panel: 5 m m / 6 m m tempered glass,

Wall thickness: 90 mm

Sound Insulation: 38~40dB

Adjustment height: 15mm

90 Style-Module system EGG-90L-Side single glass wall

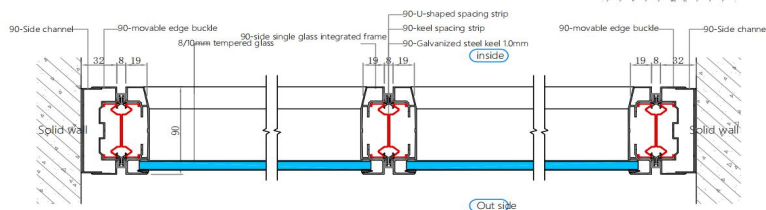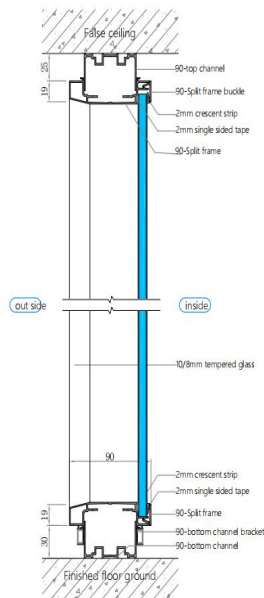

Frame: 6061-T6 Aluminum, Webster hardness 14hw, powder coating film thickness 80μm

Material thickness: 1.5 - 3.8mm

Keel: 1.0mm galvanized steel plate



Panel: 8 m m / 10 m m tempered glass,

Wall thickness: 90 mm

Sound Insulation: 38~40dB

Adjustment height: 15mm

90 Style-Module system EGG-90H-Middle single glass wal

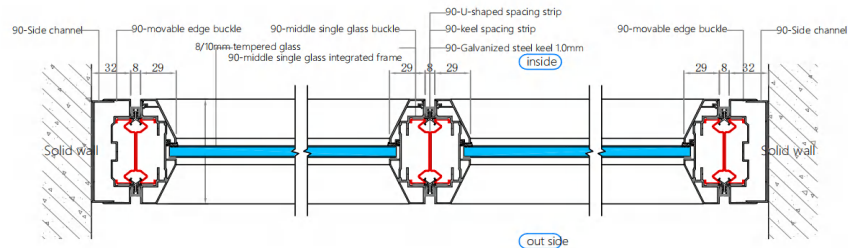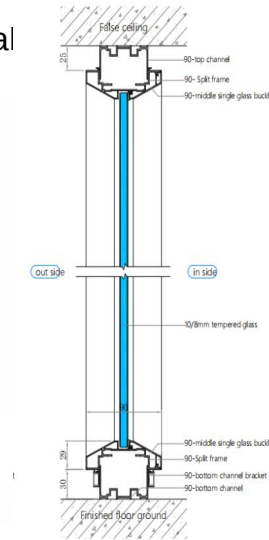

Frame: 6061-T6 Aluminum, Webster hardness 14hw, powder coating film thickness 80 μ m

Material thickness: 1.5 - 3.8mm

Keel: 1.0mm galvanized steel plate



Panel: 8 m m / 10 m m tempered glass,

Wall thickness: 90 mm

Sound Insulation: 38~40dB

Adjustment height: 15mm

90 Style-Module system EGG-90D-Double layer board wall

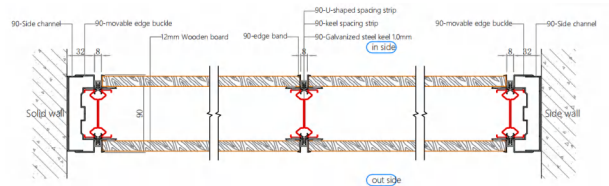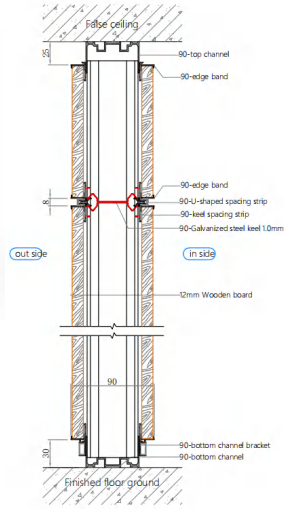

Frame: 6061-T6 Aluminum, Webster hardness 14hw, powder coating film thickness 80 μ m

Material thickness: 1.0 - 3.8mm

Keel: 1.0mm galvanized steel plate



Panel: 12mm: melamine laminate, HPL, OSB board

Wall thickness: 90 mm

Sound Insulation: 38~40dB

Adjustment height: 15mm

Assembled type-100 models Panoramic double glass system

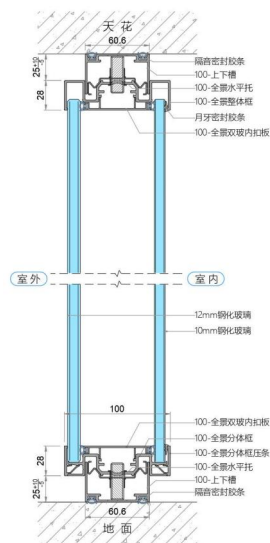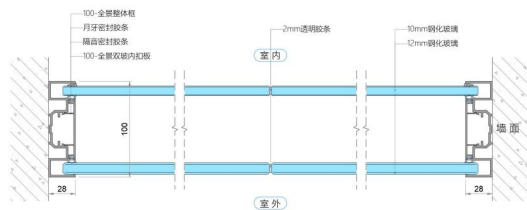

Frame: 6061-T6 Aluminum


Material thickness: 2.0-3.8mm

Panel: tempered glass



Wall thickness: 100mm

Sound Insulation: 38~42dB

Assembled type-100 models
Panoramic double glass system

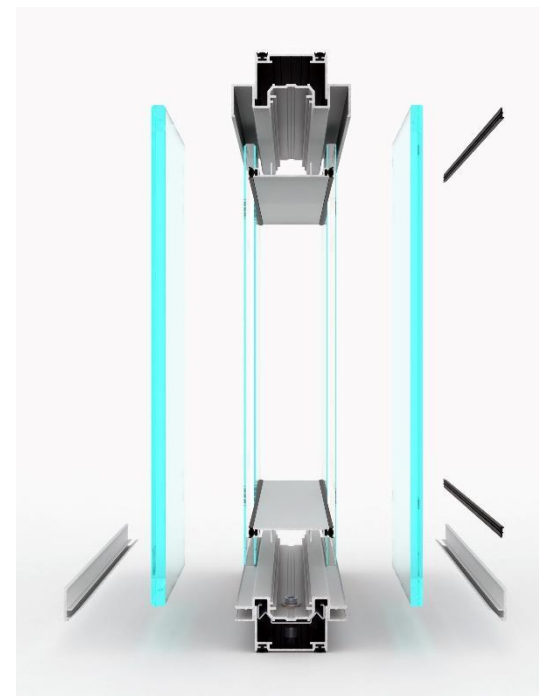

Assembled type-100 models Panoramic side single glass system

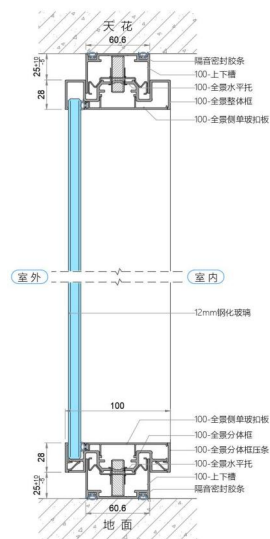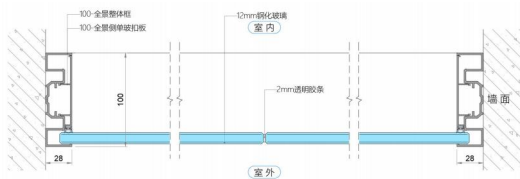

Frame: 6061-T6 Aluminum


Material thickness: 2.0-3.8mm

Panel: tempered glass


Wall thickness: 100mm

Sound Insulation: 38~42dB


Assembled type-100 models
Panoramic side single glass system

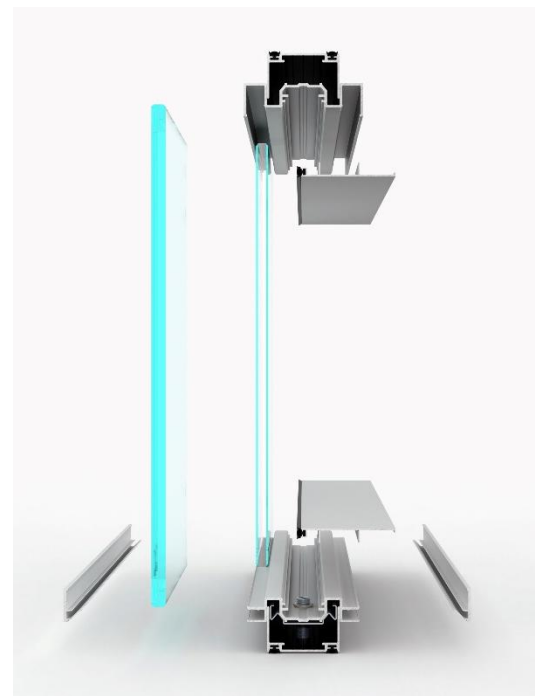

Assembled type-100 models Panoramic side single glass system

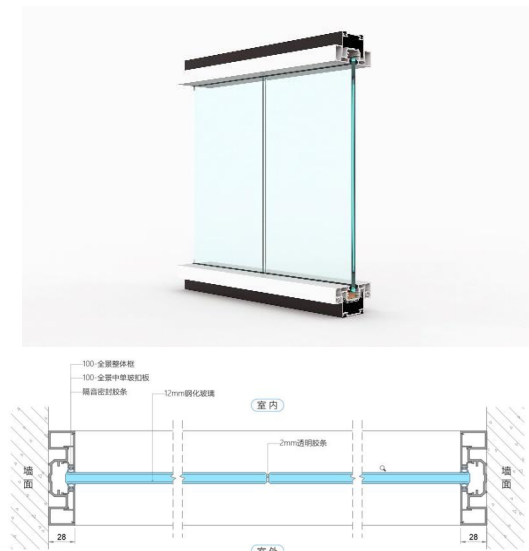

横向剖面图

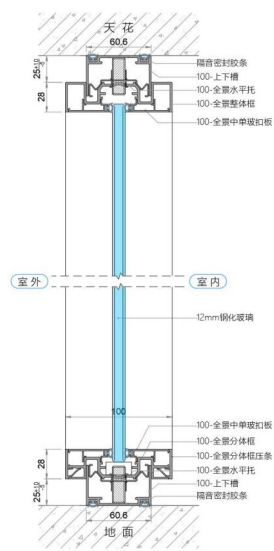

纵向剖面图



Frame: 6061-T6 Aluminum


Material thickness: 2.0-3.8mm

Panel: tempered glass

Wall thickness: 100mm




Sound Insulation: 38~42dB

Assembled type-100 models
Panoramic single glass system

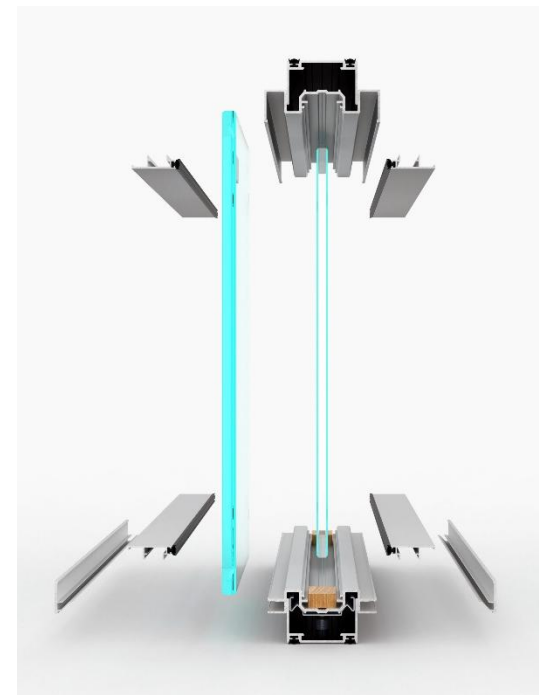


Assembled type-100 models
Clear frame double glass system



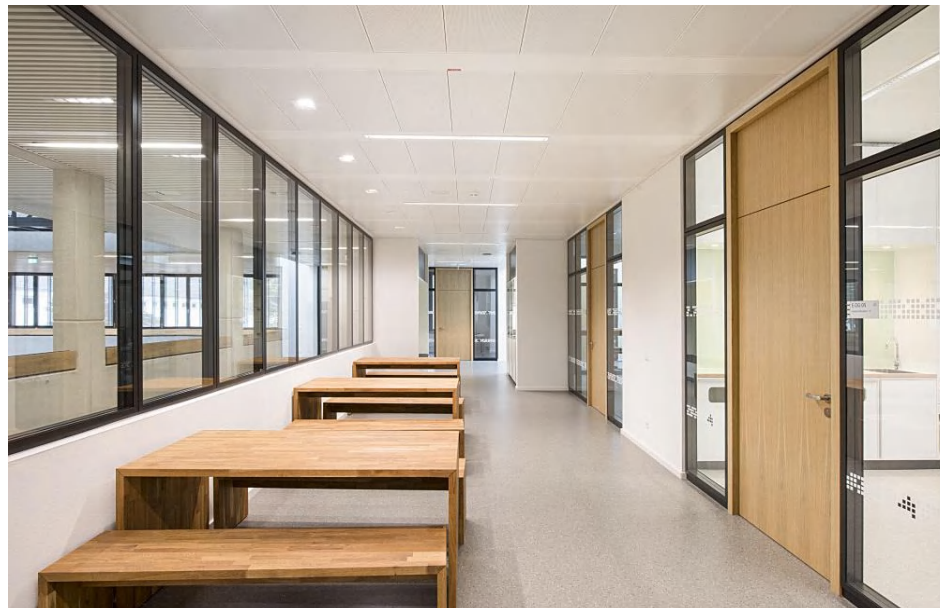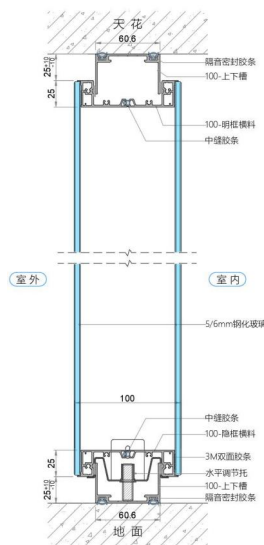
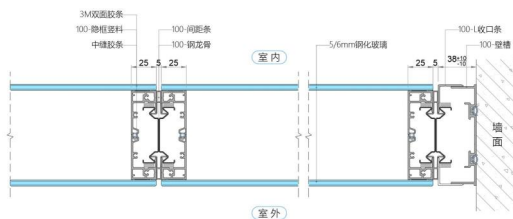


Sound isolation decibel: 35~38dB

Assembled type-100 models
Hidden frame double glass system

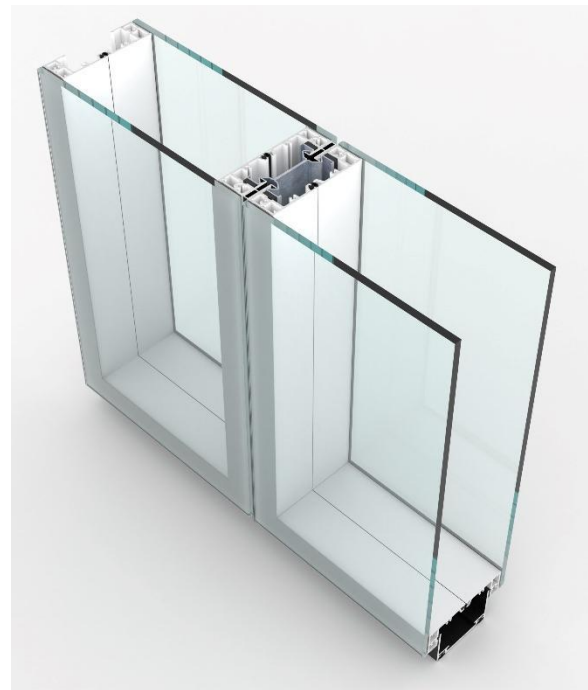

Assembled type-100 models Double deck system

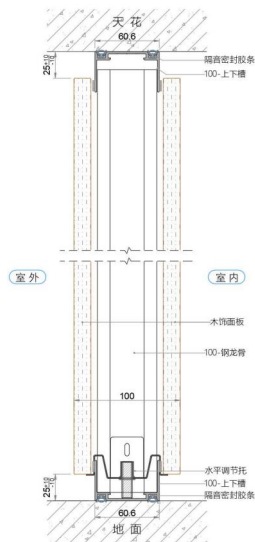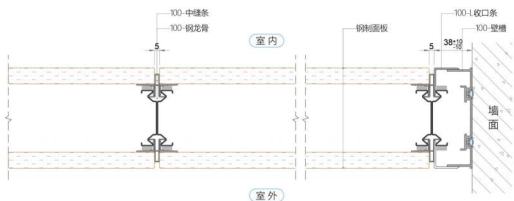

keel: cold-rolled galvanized steel plate is integrally formed into a cavity structure

Wall material: melamine board

OSB wood veneer

Composite solid wood veneer paint board

Wall thickness: 100mm



Sound isolation decibel: 45~50dB

Fire protection level: Depending on the wall material, it can reach A1 or B1 level fire protection standards

Assembled type-100 models
Double deck system



Assembled type-100 models Double-layer steel plate system

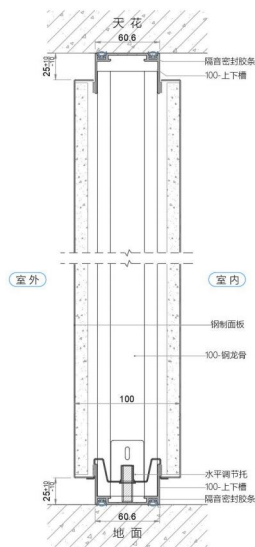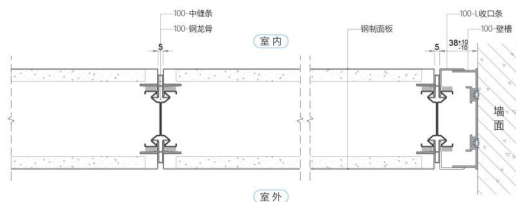

System keel: cold-rolled galvanized steel plate is integrally

formed into a cavity structure

Wall material: galvanized steel plate composite wood grain PVC
film

Wall thickness: 100mm


Sound isolation decibel: 45~50dB

Fire protection grade: A1 fire protection standard

Assembled type-100 models
Double-layer steel plate system



Prefabricated Finished door leaf system



Panel composite door leaf

System frame: 6061-T6 aluminum profile frame

Panel material: OSB decorative panel/composite fireproof panel

Composite solid wood veneer paint board


Door leaf thickness: 45/60mm

Door leaf filling: aluminum/paper honeycomb core, plywood/solid wood keel

Prefabricated Finished door leaf system



Frame: 6061-T6 Aluminum, Webster hardness 14hw, powder coating
film thickness 80μm
Material thickness: 1.8-3.8mm
Panel: 0.8 mm galvanized steel coated plate
Wall thickness: 45/60
Sound Insulation: 38~40dB
padding: Aluminum/paper honeycomb core, plywood/solid wood
keel



Frame: 6061-T6 Aluminum, Webster hardness 14hw, powder coating
film thickness 80μm
Material thickness: 1.8-3.8mm
Wall Jamb Thickness: 1.8-5.5mm
Panel: 5/6mm tempered glass
Wall thickness: 45/60

Sliding Door



Track Frame: 6061-T6 Aluminum, Webster hardness 14hw, powder coating film thickness 80μm

Material thickness: 1.8 - 3.8mm

Panel: 12mm clear temper glass

Sound Insulation: 38db

Handle: 1.2m, 1.5m stainless steel

Sliding Door



Track frame: 6061-T6 Aluminum, Webster hardness 14hw, powder coating film thickness 80μm

Material thickness: 1.8 - 3.8mm

Panel: 12mm clear temper glass

Sound Insulation: 38db

Handle: 1.2m, 1.5m stainless steel